

PMF SERIES

Semi-automatic Changeover System




Features

- Single stage.
- For purity, inert, reactive, flammable and oxidizing gas and gas mixtures.
- Hastelloy-internals for corrosive gases
- Uninterrupted gas supply with semi-automatic switch over
- Upgradable to max. 2x4 cylinders.

Technical Data

Body Material	316 Stainless steel
Inlet Pressure	Max. 300bar
Outlet Pressure	200 psig (13.8 bar)
Diaphragm (regulator)	Hastelloy ® / 316 Stainless steel (standard)
Operating Temperature	-40°F to 165°F (-40°C to 74°C)
Dimension (wxhxd)	400x154x153 mm
Weight	5.5KG
Inlet	1/4"FNPT
Outlet	1/4"FNPT
Optional	Relief valve, hose, tube fitting

Dimension (mm)

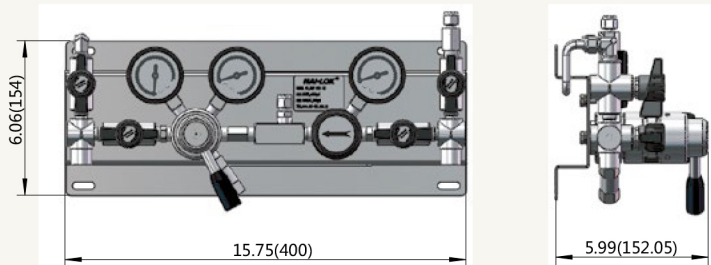

Dimension drawings shown are for reference only.

Ordering Information

PMF	S	40	20	4N	4N	W	
SERIES	BODY MATERIAL	INLET PRESSURE	OUTLET PRESSURE RANGE	INLET CONNECTION	OUTLET CONNECTION	PURGE VALVE	GAS TYPE
PMF	S - 316 Stainless steel	40-4000 psig 276 bar	20-200 psig 13.8 bar	4F - 1/4"NPTF 4N- 1/4"OD	4F - 1/4"NPTF 4N- 1/4"OD	0- Without W- With	Please specify